



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Duncan Roger HARPER, et al. Art Unit : 1712
Serial No. : 10/091,284 Examiner : Unknown
Filed : March 5, 2002
Title : AEROSOL COMPOSITIONS TO WHICH AN ELECTROSTATIC CHARGE
CAN BE IMPARTED UPON ACTUATION

Commissioner for Patents
Washington, D.C. 20231


CLAIM OF PRIORITY UNDER 35 USC §119

Sir:

Duncan Roger HARPER, Neale HARRISON, John Douglas MORGAN, John Howard CLINT and Mario ABELA, applicants in this application, hereby claim the priority date of British Application No. 9921037.9 filed on 7 September 1999. A certified copy of said British Application is here enclosed.

Respectfully submitted,

Date: 25 June 02


Frederick H. Rabin
Reg. No. 24,488

Fish & Richardson P.C.
45 Rockefeller Plaza, Suite 2800
New York, New York 10111
Telephone: (212) 765-5070
Facsimile: (212) 258-2291

COPY OF PAPERS
ORIGINALLY FILED

RECEIVED

JUL 18 2002

TC 1700

CERTIFICATE OF MAILING BY FIRST CLASS MAIL

I hereby certify under 37 CFR §1.8(a) that this correspondence is being deposited with the United States Postal Service as first class mail with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

June 25, 2002

Date of Deposit

Signature

Frederick H. Rabin

Typed or Printed Name of Person Signing Certificate



INVESTOR IN PEOPLE



The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

RECEIVED
JUL -9 2002
TECHNOLOGY CENTER 1700

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed

Dated 5 June 2002

P. Mahoney

RECEIVED
JUL 18 2002
IC 1700

TECHNOLOGY CENTER 1700

RECEIVED
JUL 25 2002

1990

1. *Chlorophyll a* (Chl *a*)
 2. *Chlorophyll b* (Chl *b*)
 3. *Chlorophyll c* (Chl *c*)
 4. *Chlorophyll d* (Chl *d*)
 5. *Chlorophyll e* (Chl *e*)
 6. *Chlorophyll f* (Chl *f*)
 7. *Chlorophyll g* (Chl *g*)
 8. *Chlorophyll h* (Chl *h*)
 9. *Chlorophyll i* (Chl *i*)
 10. *Chlorophyll j* (Chl *j*)
 11. *Chlorophyll k* (Chl *k*)
 12. *Chlorophyll l* (Chl *l*)
 13. *Chlorophyll m* (Chl *m*)
 14. *Chlorophyll n* (Chl *n*)
 15. *Chlorophyll o* (Chl *o*)
 16. *Chlorophyll p* (Chl *p*)
 17. *Chlorophyll q* (Chl *q*)
 18. *Chlorophyll r* (Chl *r*)
 19. *Chlorophyll s* (Chl *s*)
 20. *Chlorophyll t* (Chl *t*)
 21. *Chlorophyll u* (Chl *u*)
 22. *Chlorophyll v* (Chl *v*)
 23. *Chlorophyll w* (Chl *w*)
 24. *Chlorophyll x* (Chl *x*)
 25. *Chlorophyll y* (Chl *y*)
 26. *Chlorophyll z* (Chl *z*)
 27. *Chlorophyll aa* (Chl *aa*)
 28. *Chlorophyll ab* (Chl *ab*)
 29. *Chlorophyll ac* (Chl *ac*)
 30. *Chlorophyll ad* (Chl *ad*)
 31. *Chlorophyll ae* (Chl *ae*)
 32. *Chlorophyll af* (Chl *af*)
 33. *Chlorophyll ag* (Chl *ag*)
 34. *Chlorophyll ah* (Chl *ah*)
 35. *Chlorophyll ai* (Chl *ai*)
 36. *Chlorophyll aj* (Chl *aj*)
 37. *Chlorophyll ak* (Chl *ak*)
 38. *Chlorophyll al* (Chl *al*)
 39. *Chlorophyll am* (Chl *am*)
 40. *Chlorophyll an* (Chl *an*)
 41. *Chlorophyll ao* (Chl *ao*)
 42. *Chlorophyll ap* (Chl *ap*)
 43. *Chlorophyll aq* (Chl *aq*)
 44. *Chlorophyll ar* (Chl *ar*)
 45. *Chlorophyll as* (Chl *as*)
 46. *Chlorophyll at* (Chl *at*)
 47. *Chlorophyll au* (Chl *au*)
 48. *Chlorophyll av* (Chl *av*)
 49. *Chlorophyll aw* (Chl *aw*)
 50. *Chlorophyll ax* (Chl *ax*)
 51. *Chlorophyll ay* (Chl *ay*)
 52. *Chlorophyll az* (Chl *az*)
 53. *Chlorophyll aza* (Chl *aza*)
 54. *Chlorophyll abz* (Chl *abz*)
 55. *Chlorophyll acz* (Chl *acz*)
 56. *Chlorophyll adz* (Chl *adz*)
 57. *Chlorophyll aez* (Chl *aez*)
 58. *Chlorophyll afz* (Chl *afz*)
 59. *Chlorophyll agz* (Chl *agz*)
 60. *Chlorophyll ahz* (Chl *ahz*)
 61. *Chlorophyll aiz* (Chl *aiz*)
 62. *Chlorophyll ajz* (Chl *ajz*)
 63. *Chlorophyll akz* (Chl *akz*)
 64. *Chlorophyll alz* (Chl *alz*)
 65. *Chlorophyll amz* (Chl *amz*)
 66. *Chlorophyll anz* (Chl *anz*)
 67. *Chlorophyll aoz* (Chl *aoz*)
 68. *Chlorophyll apz* (Chl *apz*)
 69. *Chlorophyll aqz* (Chl *aqz*)
 70. *Chlorophyll arz* (Chl *arz*)
 71. *Chlorophyll asz* (Chl *asz*)
 72. *Chlorophyll atz* (Chl *atz*)
 73. *Chlorophyll auz* (Chl *auz*)
 74. *Chlorophyll avz* (Chl *avz*)
 75. *Chlorophyll awz* (Chl *awz*)
 76. *Chlorophyll axz* (Chl *axz*)
 77. *Chlorophyll ayz* (Chl *ayz*)
 78. *Chlorophyll ayz* (Chl *ayz*)
 79. *Chlorophyll azz* (Chl *azz*)
 80. *Chlorophyll azaa* (Chl *aza*)
 81. *Chlorophyll abz* (Chl *abz*)
 82. *Chlorophyll acz* (Chl *acz*)
 83. *Chlorophyll adz* (Chl *adz*)
 84. *Chlorophyll aez* (Chl *aez*)
 85. *Chlorophyll afz* (Chl *afz*)
 86. *Chlorophyll agz* (Chl *agz*)
 87. *Chlorophyll ahz* (Chl *ahz*)
 88. *Chlorophyll aiz* (Chl *aiz*)
 89. *Chlorophyll ajz* (Chl *ajz*)
 90. *Chlorophyll akz* (Chl *akz*)
 91. *Chlorophyll alz* (Chl *alz*)
 92. *Chlorophyll amz* (Chl *amz*)
 93. *Chlorophyll anz* (Chl *anz*)
 94. *Chlorophyll aoz* (Chl *aoz*)
 95. *Chlorophyll apz* (Chl *apz*)
 96. *Chlorophyll aqz* (Chl *aqz*)
 97. *Chlorophyll arz* (Chl *arz*)
 98. *Chlorophyll asz* (Chl *asz*)
 99. *Chlorophyll atz* (Chl *atz*)
 100. *Chlorophyll auz* (Chl *auz*)
 101. *Chlorophyll avz* (Chl *avz*)
 102. *Chlorophyll awz* (Chl *awz*)
 103. *Chlorophyll axz* (Chl *axz*)
 104. *Chlorophyll ayz* (Chl *ayz*)
 105. *Chlorophyll ayz* (Chl *ayz*)
 106. *Chlorophyll azz* (Chl *azz*)
 107. *Chlorophyll azaa* (Chl *aza*)
 108. *Chlorophyll abz* (Chl *abz*)
 109. *Chlorophyll acz* (Chl *acz*)
 110. *Chlorophyll adz* (Chl *adz*)
 111. *Chlorophyll aez* (Chl *aez*)
 112. *Chlorophyll afz* (Chl *afz*)
 113. *Chlorophyll agz* (Chl *agz*)
 114. *Chlorophyll ahz* (Chl *ahz*)
 115. *Chlorophyll aiz* (Chl *aiz*)
 116. *Chlorophyll ajz* (Chl *ajz*)
 117. *Chlorophyll akz* (Chl *akz*)
 118. *Chlorophyll alz* (Chl *alz*)
 119. *Chlorophyll amz* (Chl *amz*)
 120. *Chlorophyll anz* (Chl *anz*)
 121. *Chlorophyll aoz* (Chl *aoz*)
 122. *Chlorophyll apz* (Chl *apz*)
 123. *Chlorophyll aqz* (Chl *aqz*)
 124. *Chlorophyll arz* (Chl *arz*)
 125. *Chlorophyll asz* (Chl *asz*)
 126. *Chlorophyll atz* (Chl *atz*)
 127. *Chlorophyll auz* (Chl *auz*)
 128. *Chlorophyll avz* (Chl *avz*)
 129. *Chlorophyll awz* (Chl *awz*)
 130. *Chlorophyll axz* (Chl *axz*)
 131. *Chlorophyll ayz* (Chl *ayz*)
 132. *Chlorophyll ayz* (Chl *ayz*)
 133.


07-SEP-99 (TUE) 11:45

R & C PATENTS

TEL: 01482 582902

P. 003

Patents Form 1/77

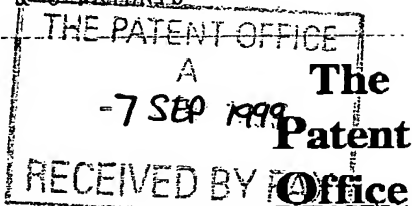Patents Act 1977
(Rule 16)07SEP99 11:47 -1 D021/3
P01/7700 0.00 - 9921037.5

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get
an explanatory leaflet from the Patent Office to help
you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

10279P1 GB/ED

2. Patent application number

(The Patent Office will fill in this part)

-7 SEP 1999

3. Full name of applicant or of each applicant (in surnames)

9921037.9

Reckitt & Colman Products Limited and Reckitt & Colman Pty Limited
One Burlington Lane
LONDON
W4 2RW
UNITED KINGDOM

44 Wharf Road
West Ryde
New South Wales 2114
AUSTRALIA

Patents ADP number (if you know it)

If the applicant is a corporate body, give the
country/state of its incorporation

ENGLAND

AUSTRALIA

4. Title of the invention

COMPOSITIONS

5. Name of your agent (if you have one)

Elizabeth A Dickson

"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

~~Reckitt & Colman plc~~
Group Patents Department
Dansom Lane
HULL, HU8 7DS
UNITED KINGDOM

Reckitt Benckiser plc

Patents ADP number (if you know it)

7517675001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application
(day / month / year)Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d))

Yes

07-SEP-99 (TUE) 11:45

R & C PATENTS

TEL: 01482 582902

P.00

THE PATENT OFFICE

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form

Description

33 pages

Claim(s)

6 pages

Abstract

1 page

Drawing(s)

1 page

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

One

One

FS2

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 7 September 1999

Elizabeth Anne Dickson

12. Name and daytime telephone number of Person to contact in the United Kingdom

Elizabeth Dickson (01482) 582909

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patents Office.

- 1 -

COMPOSITIONS

The present invention relates to aerosol compositions and, in particular, compositions in which the droplets are imparted with an electrostatic charge on spraying from an aerosol spray device and in which the electrostatic charge on the droplets is maximised through the inclusion in the compositions of certain selected components.

Aerosol spray devices are a convenient form in which a variety of useful products, such as insecticides, air fresheners, antiperspirants, hair sprays, horticultural products, waxes and polishes, oven cleaners, starches and fabric finishes, shoe and leather care products, glass cleaners and various other household, institutional, professional or industrial products, can be dispensed.

The utility of aerosol spray devices resides in the ability to readily deliver the composition contained within the device in the form of fine droplets to the target area, for example the spraying of an insecticide onto target insects.

In WO 97/28883 there is described a method of precipitating airborne particles from air in a domestic environment containing such particles in which the air to be treated is sprayed with liquid droplets from an aerosol spray device with a unipolar charge being imparted to the droplets during the spraying of the liquid droplets by the aerosol spray device, the unipolar charge being at a level such that the droplets have a charge to mass ratio of at least $\pm 1 \times 10^{-4}$ C/kg.

In WO 99/01227 there is described a method of killing flying insects by spraying into the air in which the insects are flying liquid droplets of an

07-SEP-'99 (TUE) 11:46 R & C PATENTS

TEL: 01482 582902

P. 009

- 2 -

insecticidal composition, a unipolar charge being imparted to the liquid droplets by double layer charging and charge separation during spraying, the unipolar charge being at a level such that the said liquid droplets have a charge to mass ratio of at least $\pm 1 \times 10^{-4}$ C/kg. An apparatus for imparting the unipolar charge of this magnitude to a liquid composition is also described.

We have now found that by careful selection of the components which are to be contained within a liquid composition for application by aerosol spraying, it is possible to charge the liquid droplets during the spraying operation without requiring any special features of the construction of the aerosol spraying head.

Accordingly, in one aspect the present invention provides an electrically neutral composition in the form of a water-in-oil or an oil-in-water emulsion, in which droplets of the emulsion on discharge from an aerosol spray device are imparted with a unipolar electrostatic charge, which composition comprises:

(a) at least one propellant in an amount of from 2 to 80% w/w;

(b) at least one non-ionic surfactant in an amount of from 0.01 to 10% w/w;

(c) optionally one or more solvents within the oil phase in an amount of up to 40% w/v;

(d) at least one polar or ionic or aromatic or conjugated compound which is attracted to the interface between the disperse phase and the continuous phase of the emulsion in an amount of from 0.01 to 18% w/w based on the non-ionic surfactant, but which is such that the theoretical conductivity of the emulsion is less than the bulk conductivity of the emulsion; and

- 3 -

(e) water.

In a second aspect the present invention provides a method of enhancing the unipolar charge which is imparted to droplets of an emulsion on discharge from an aerosol spray device in which the droplets are formed from an oil-in-water or a water-in-oil emulsion composition which comprises:

(a) at least one propellant in an amount of from 2 to 80% w/w;

(b) at least one non-ionic surfactant in an amount of from 0.01 to 10% w/w;

(c) optionally one or more solvents within the oil phase in an amount of up to 40% w/w;

(d) at least one polar or ionic or aromatic or conjugated compound which is attracted to the interface between the disperse phase and the continuous phase of the emulsion in an amount of from 0.01 to 80% w/w based on the non-ionic surfactant, but which is such that the theoretical conductivity of the emulsion is less than the bulk conductivity of the emulsion; and

(e) water.

In a third aspect the present invention provides the use of a non-ionic surfactant and at least one polar or ionic or aromatic or conjugated compound in an amount of from 0.01 to 80% w/w based on the non-ionic surfactant to enhance the electrostatic charge imparted to droplets of a composition in the form of a water-in-oil or an oil-in-water emulsion on discharge from an aerosol spray device, which composition includes:

(a) at least one propellant in an amount of from 2 to 80% w/w;

(b) optionally one or more solvents within the oil phase in an amount of up to 40% w/w; and

- 4 -

(c) water, and the amount of the polar or ionic or aromatic or conjugated compound being such that the theoretical conductivity of the emulsion is less than the bulk conductivity of the emulsion.

In a fourth aspect the present invention provides an aerosol spray which contains an electrically neutral composition in the form of a water-in-oil emulsion, an oil-in-water emulsion or a single phase composition, in which droplets of the composition on discharge from the aerosol spray device are imparted with a unipolar electrostatic charge, wherein the formulation of the composition and the material of the portion of the aerosol spray device with which the liquid comes into contact on spraying are selected such that

- i) the difference between the Lewis base component of the liquid and the Lewis base component of the material with which the liquid comes into contact on spraying is at least $\pm 5 \text{ mJm}^{-2}$; and/or;
- ii) the difference between the Lewis acid component of the liquid and the Lewis acid component of the material with which the liquid comes into contact on spraying is at least $\pm 0.5 \text{ mJm}^{-2}$.

The liquid droplets preferably have a charge to mass ratio of at least $\pm 1 \times 10^{-4} \text{ C/kg}$, more preferably at least $\pm 2 \times 10^{-4} \text{ C/kg}$. The higher the charge to mass ratio of the liquid droplets, the more effective the liquid droplets will be for their intended use, such as precipitating airborne particles and targeting insects. This charge level is considerably higher than the charge level which is

- 5 -

achieved when spraying conventional liquid formulations from conventional aerosol spray device where charge levels of the order of $\pm 1 \times 10^{-5}$ to $\pm 1 \times 10^{-8}$ C/kg are obtained.

5 In the formulations of the present invention it is the combination of components (b) and (d) of the emulsion which improves the electron transfer through the emulsion with the charge being transferred from droplet to droplet through the emulsion at the interface between the disperse phase and the continuous phase.

10 The various components (a) to (e) of the compositions of the present invention are discussed in turn below:

15 Propellants

One or more propellants are used in the composition of the invention in a total amount of from 2 to 80% w/w. Amongst the propellants that may be used are hydrocarbons and compressed gas, of which hydrocarbons are preferred.

20 Hydrocarbon propellants which may be used are acetylene, methane, ethane, ethylene, propane, n-butane, n-butene, isobutane, isobutene, pentane, pentene, isopentane and isopentene. Mixtures of these propellants may also be used. Commercially available propellants typically contain a number of hydrocarbon gases. For example, an odourised commercial butane, contains predominantly n-butane and some iso-butane, together with small amounts of propane, propene, pentane and butene.

25 Preferred hydrocarbon propellants include propane, n-butane, isobutane, pentane and isopentane, whilst the most preferred are propane, iso-butane and n-butane.

35

07-SEP: '99 (TUE) 11:47 R & C PATENTS

TEL:01482 582902

P.013

- 6 -

Particularly preferred hydrocarbon propellants are mixtures of propane, n-butane and iso-butane.

Whilst broadly the concentration of hydrocarbon propellant will be from 2 to 80% w/w, generally the concentration will be from 10 to 60% w/w, preferably 25 to 60% w/w and most preferably about 40% w/w.

When compressed gases are used as a propellant these will generally be carbon dioxide, nitrogen or air. Usually, they will be used at a concentration of 2 to 20% w/w, preferably about 5% w/w.

Non-ionic Surfactants

Non-ionic surfactants for use in the present invention include mono, di and tri sorbitan esters, polyoxyethylene mono, di and tri sorbitan esters; mono and polyglyceryl esters; alkoxyated alcohols; alkoxyated amines; alkoxyated acids; amine oxides; ethoxyated/propoxyated block copolymers; alkoxyated alkanolamides; and alkoxyated alkyl phenols.

Particularly preferred are those surfactants which contain at least one alkyl, allyl or substituted phenyl group containing at least one C₆ to C₂₂ carbon chain. Examples are esters with C₁₀-C₂₂ fatty acids, preferably C₁₂-C₁₈ fatty acids, particularly polyglycerol oleate and ethoxyated fatty alcohols, such as oleyl alcohol ethoxyated with two moles of ethylene oxide.

In some instances, the non-ionic surfactant may itself be combined with component (d). For example, when the non-ionic surfactant is polyglycerol oleate, the surfactant may contain small quantities of sodium or potassium oleate, for example is an amount of from 0.01 to 1% by weight. Greater quantities of such ionic compounds are generally not desirable and may

- 7 -

result in the compositions not fulfilling the conductivity requirements of the compositions of the invention.

5 The concentration of the non-ionic surfactant is from 0.01 to 10% w/w, preferably 0.01 to 1% w/w.

Polar, ionic, aromatic or conjugated compounds

10 The polar or ionic or aromatic or conjugated compound which is included as component (d) in the compositions of the present invention may be selected from:

a) alkali metal salts, alkaline earth metal salts, ammonium salts, amine salts or amino alcohol salts of one or more of the following compounds: alkyl sulphates, alkyl ether sulphates, alkylamidoether sulphates, alkylarylpolyether sulphates, monoglyceride sulphates, polyglyceride sulphates, alkyl sulphonates, alkylamine sulphonates, alkyl-aryl sulphonates, olefin sulphonates, paraffin sulphonates, alkyl sulpho-succinates, alkylether sulphosuccinates, alkylamide sulphosuccinates, alkyl sulphocinnamates, alkyl sulphoacetates, alkyl phosphates, alkylether phosphates, acyl sarcosinates, acyl isothionates and N-acyl taurates;

25 b) alkyl amidopropylbetaines, alkylamido-betaines, alkylamidosulphobetaines, alkylbetaines, aminimides, quaternary ammonium compounds and quaternary phosphonium compounds;

30 c) carboxylic acids, carboxylic acid salts, esters, ketones, aldehydes or amides of carboxylic acids containing from 6 to 30 carbon atoms;

35 d) diethyl orthophthalate, methylphenylcarbonyl acetate, α -methyl ionone, 4-hydroxy 3-methoxy-benzaldehyde, phenylethyl alcohol, dipropylene glycol, styryl acetate, n-butyl benzoate, isopropyl 4-

- 8 -

hydroxybenzoate, isobutyl acetophenone, isopropyl acetophenone, nicotinic acid, benzoic acid, 2-naphthol, neopentyl benzene, naphthalene, toluene and fullerene.

5 Particularly preferred compounds in group (b) are alkyl dimethylbenzyl ammonium chloride, octyltrimethyl ammonium bromide, cetyltrimethylammonium bromide and dodecyltrimethylphosphonium bromide.

10 Particularly preferred compounds in group (c) are lauric, oleic, palmitic, ricinoleic and stearic acids, or the salts amides, esters, ketones or aldehydes thereof.

The concentration of component (d) is from 0.01 to 80% w/w, preferably from 0.01 to 30%, more preferably from 0.1 to 10% w/w based on the non-ionic surfactant, component (b). The amount of component (d) is selected so that the bulk conductivity is greater than the theoretical conductivity. In some cases, too great an amount of component (d) can result in the composition not fulfilling the conductivity requirement of the compositions of the invention.

Solvents

25 One or more solvents may be incorporated in the compositions of the invention in an amount of up to 40% w/w. Generally, the solvent will be water immiscible.

30 A wide range of solvent materials may be used, although care should be exercised to ensure that the solvent does not adversely interact with any active components of the compositions of the invention, such as insecticides.

Examples of solvents that may be used in the compositions of the invention include:-

35 liquid n-paraffins, liquid isoparaffins,

- 9 -

cycloalkanes, naphthene-containing solvents, white spirit, kerosene, ester solvents, silicone solvents or oils, fatty acids, dialkyl phthalates, C_8 - C_{11} alcohols and fatty alcohols. Specific examples of these are as follows:

liquid n-paraffins - Norpar 12, Norpar 13 and Norpar 15 (available from Exxon)

liquid isoparaffins - Isopar G, Isopar H, Isopar L, Isopar M and Isopar V (available from Exxon).

Naphthene-containing solvents - Exxsol D40, Exxsol D60, Exxsol D80, Exxsol D100, Exxsol D110, Nappar 10, Solvesol 100, Solvesol 150, Solvesol 200 (available from Exxon)

Ester solvents - such as alkyl acetates, examples being Exxate 1000, Exxate 1300 (available from Exxon), and Coasol (available from Chemoxy International);

Silicone solvent oils - Dow Corning 244, 245, 344 and 345 fluids,

Fatty alcohols - octanol, dodecanol, lauryl alcohol, myristyl alcohol, cetyl alcohol, stearyl alcohol, cetostearyl alcohol, oleyl alcohol.

Preferred solvents are liquid hydrocarbon solvents, n-paraffins, and iso-paraffins.

Although the solvent is preferably incorporated as a level of from 1 to 20% w/w, more preferably the concentration will be in the range of from 2 to 10% w/w, most preferably about 5% w/w.

Insecticidal Compositions

In one preferred agent of the present invention the compositions are insecticidal compositions which contain from 0.001 to 5% w/w of an insecticidal compound. A wide range of active ingredients may be used of which pyrethroids, particularly synthetic pyrethroids, chlorpyrifos, propoxur and diazinon are

- 10 -

preferred. When synthetic pyrethroids such as lambda

cyhalothrin and bioresmethrin are used, generally they will be incorporated in concentrations of about 0.02% w/w or above.

Other synthetic pyrethroids such as cypermethrin, tetramethrin, permethrin and bioallethrin, will usually be incorporated to give a concentration of about 0.2%-0.5% w/w, or above.

Chloropyrifos, propoxur and diazinon will generally be incorporated to give concentration in the range of 0.5-0.9% w/w.

Preferably, insecticidal compositions of the invention will include an insecticide which functions primarily to knock down an insect, together with a second insecticide which functions primarily as a kill agent. An example of such a combination is the use of permethrin as a kill agent in a combination with tetramethrin as a knock down agent.

Optional Ingredients

Various optional ingredients may be incorporated into the compositions of the present invention. For example, in order to maximise the effectiveness of the insecticidal activity of the compositions of the invention, synergists such as N-octylbicycloheptene dicarboximide and piperonyl butoxide may be included at a concentration of from 0.5 to 1.5% w/w, most preferably about 1.0% w/w, for use in conjunction with pyrethroid insecticides.

In addition, other ingredients including corrosion inhibitors, such as 1-hydroxyethyl-2-heptadecenyl imidazoline and/or sodium benzoate, preferably in a concentration from 0.01 to 0.5% w/w, preservatives and antioxidants, such as butylated

- 11 -

hydroxytoluene, may be used as required. One or more fragrance components may also be included, according to the particular consumer requirements. It will be understood that certain fragrance components are components which may comprise component (d) of the compositions of the present invention and in this instance, such a component is not an optional ingredient.

10 Lewis Acid and Lewis Base Characteristics

In relation to the fourth embodiment of the invention an aerosol spray device and the electrically neutral composition contained therein have certain Lewis acid and Lewis base characteristics which assist in imparting a unipolar charge to the liquid.

15 When two substances are brought together and then separated, an electrical charge is transferred from one to the other. This can occur for solid-solid separations, for solid-liquid separations and for liquid-liquid separations. When one of the components becomes airborne, the electrical charge can remain on the substance for a significant length of time as there is no place to ground the charge. The ability of substances to transfer their charge can be related to the characteristic Lewis acid (γ^+) and Lewis base (γ^-) values for the substance. All substances have characteristic values and these can be calculated indirectly from their component surface energies.

20 These surface energies when combined with a London-Van der Waal component (γ^{LW}) form what is known as the surface tension. This is easiest to measure at the interface between a drop of liquid on a solid substrate.

25 This equation used for these calculations comes from the approach used by Good and van Oss:

07-SEP.'99 (TUE) 11:50 R & C PATENTS

TEL:01482 582902

P. 019

- 12 -

$$(1 + \cos \theta) \gamma_L = 2[\sqrt{(\gamma_s^{LW} \gamma_L^{LW})} + \sqrt{(\gamma_s^+ \gamma_L^-)} + \sqrt{(\gamma_s^- \gamma_L^+)}]$$

Where θ is the contact angle that a drop of liquid makes with the surface.

γ_s is the energy components for the solid.

γ_L is the energy component for the liquid.

γ^{LW} Represents the London-Van der Waal's component.

γ^+ is the Lewis acid component (electron acceptor).

γ^- is the Lewis base component (electron donor).

Using three or more test liquids whose characteristics are known, it is possible to solve this equation for the three unknowns, γ_s^{LW} , γ_s^+ and γ_s^- . By using test solids whose characteristics are known, it is also possible to solve this equation to find the three unknown liquid surface energies. Thus it is possible to characterise a series of solids and liquids to form a series of γ^+ and γ^- values. In the case of solids this series matches that of the triboelectric series. Below is a non-exclusive list of solid substances that form part of this triboelectric series. The values are scaled such that water has a γ^- and γ^+ of 25 mJm⁻². The top of the list tends to become positive, when separated from a substance at the bottom of the list, which would become negative.

- 13 -

| Surface | γ^- (mJm ⁻²) |
|-------------------|---------------------------------|
| + Glass | 16 |
| Acetal 900P NC-10 | 15 |
| Celluloid | 13.8 |
| PMMA | 12 |
| Nylon | 11.3 |
| PVC | 8.4 |
| Polyester 2002-2 | 5 |
| Polyethylene | 0.1 |
| Polypropylene | 0.04 |
| - PTFE | 0 |

Liquids also have a value of γ^- and γ^+ that can be measured. When liquids contact a solid of known γ^- and γ^+ on aerosol spraying, and the γ^- of the liquid is greater than, or less than that of the solid by 5 mJm⁻², most preferably 15 mJm⁻², or a γ^+ greater than, or less than that of the solid by 0.5 mJm⁻² preferably 1 mJm⁻², most preferably 2 mJm⁻², the liquid has a tendency to charge to $\pm 1 \times 10^{-4}$ C/kg. A common material from which inserts for aerosol actuators are made is Acetal 900P NC-10, which has a γ^- of 15 mJm⁻².

Aerosol Spray Devices

The compositions of the present invention, when sprayed through conventional aerosol spray heads, form into droplets which are imparted with a unipolar charge of at least $\pm 1 \times 10^{-4}$ C/kg.

It is possible to impart even higher charges to the liquid droplets by choosing aspects of the aerosol device including the material, shape and dimensions of the actuator, the actuator insert, the valve and the dip tube and the characteristics of the liquid which is to be sprayed, so that the required level of charge is generated as the liquid is dispersed as droplets.

- 14 -

A number of characteristics of the aerosol system increase double layer charging and charge exchange between the liquid formulation and the surface of the aerosol system. Such increases are brought about by factors which may increase the turbulence of the flow through the system, and increase the frequency and velocity of contact between the liquid and the internal surface of the container and valve and actuator system.

By way of example, characteristics of the actuator can be optimised to increase the charge levels on the liquid sprayed from the container. A smaller orifice in the actuator insert, of a size of 0.45mm or less, increases the charge levels of the liquid sprayed through the actuator. The choice of material for the actuator can also increase the charge levels on the liquid sprayed from the device with materials such as nylon, polyester, acetal, PVC and polypropylene tending to increase the charge levels. The geometry of the orifice in the insert can be optimised to increase the charge levels on the liquid as it is sprayed through the actuator. Inserts which promote the mechanical break-up of the liquid give better charging.

The actuator insert of the spray device may be formed from a conducting, insulating, semi-conducting or static-dissipative material.

The characteristics of the dip tube can be optimised to increase charge levels in the liquid sprayed from the container. A narrow dip tube, of for example about 1.27mm internal diameter, increases the charge levels on the liquid, and the dip tube material can also be changed to increase charge.

Valve characteristics can be selected which increase the charge to mass ratio of the liquid

- 15 -

product as it is sprayed from the container. A small tailpiece orifice in the housing, of about 0.65mm, increases the charge to mass ratio during spraying. A reduced number of holes in the stem, for example 2 x 0.50mm, also increases the charge during spray. The presence of a vapour phase tap helps to maximise the charge levels, a larger orifice vapour phase tap of, for example, about 0.50mm to 1.0mm generally giving higher charge levels.

The liquid droplets sprayed from the aerosol spray device will generally have diameters in the range of from 5 to 100 micrometres, with a peak of droplets of about 40 micrometres.

Preparation

The compositions of the present invention may be prepared by standard techniques which are well known in the art. For example, components (b) to (d) may be mixed together to form the solvent phase. This solvent phase is then mixed with water to produce an emulsified concentrate which is then filled into cans and blended with the propellant. Alternatively, the concentrate and the propellant may be filled into the cans simultaneously.

Conductivity

The theoretical conductivity of an emulsion, σ , can be calculated from measurements of the actual conductivity of the external phase and the internal phase, according to the following equation:

$$\sigma = \sigma_e (1 - 3\phi(\sigma_p - \sigma_e) / (\sigma_p + 2\sigma_e))$$

where σ = theoretical conductivity of the emulsion

σ_e = measured conductivity of the

separated external phase

- 16 -

measured conductivity of the
separated internal phase
volume fraction of the external
phase.

5 The bulk conductivity can be determined by
experimentation. Component (d) of the compositions of
the present invention serves to enhance the actual
conductivity of the emulsion and thus the bulk
conductivity of the emulsion is higher than the
10 theoretical conductivity calculated according to the
above formula. Preferably the difference between the
theoretical conductivity of the emulsion of the
emulsion is at least $+0.5\mu S/cm$, preferably at least
74 $\mu S/cm$, more preferably at least $+6\mu S/cm$. Component
15 (d) in the compositions of the present invention thus
improves the electron transfer through the emulsion
with the charge being transferred from droplet to
droplet through the emulsion at the interface between
the disperse phase and the continuous phase.

20 The present invention will be further described
with reference to the following non-limiting Examples.

Method for predicting the theoretical conductivity of
25 an emulsion through the measurement of the
conductivity of the individual phases:

1. Calibrate the conductivity cell by measuring
a solution of known conductivity. The
conductivity cell comprises a pair of
30 platinum electrodes, held apart and attached
to the inside of a glass tube of
approximately 1cm internal diameter.
2. Using the same cell, measure the
conductivity of the bulk emulsion according
35 to the invention, whilst ensuring that the

- 17 -

emulsion is static and homogeneous prior to taking the measurement.

3.3. Determine whether the continuous phase of the emulsion is water or oil.

5 4.0 Separate the two phases of the emulsion by either gravimetric or centrifugal separation. Isolate the phases and measure the conductivity of each phase in the calibrated cell.

10 5.1 Use the equation given below to determine the theoretical conductivity of the bulk emulsion.

15 6.1 The difference between the theoretical conductivity and that obtained directly from the measurements is the contribution to the bulk conductivity due to the emulsion droplets.

where σ_c = measured conductivity of the separated external phase
 σ_p = measured conductivity of the separated internal phase
 ϕ = volume fraction of the external phase

20 σ_c = measured conductivity of the separated external phase
 σ_p = measured conductivity of the separated internal phase
 ϕ = volume fraction of the external phase

25 ϕ = volume fraction of the external phase

Measurement of Electrostatic Charge

30 The charge to mass ratio of the compositions of Examples 4 to 50 was measured using a standard aerosol can with a valve insert made from polyoxymethylene according to the design shown in accompanying Figure 1 in which

Fig. 1a is a plan view,

35 Fig. 1b is a sectional view, and

07-SEP. '99 (TUE) 11:51 R & C PATENTS

TEL:01482 582902

P. 025

- 18 -

Fig. 1c is a inverted plan view of the valve insert.

EXAMPLE 1 (Comparative)

5

An emulsion was prepared from the following ingredients:

Ingredient

10

Ethoxylated (7EO) alcohol ($C_{12}-C_{15}$) 0.24 w/v

Deionised water 47 v/v

Decane 55 v/v

Actual (measured) conductivity of the bulk emulsion 7.4 μS cm

σ_c 16.6 μS cm

15

σ_p 4.1 μS cm

Assuming $\phi =$ 0.5

σ 8.2 μS cm

Difference (conductivity due the emulsion droplets) = 7.4 - 8.2 = -0.8 μS cm.

20

This composition did not contain any component (d) and as can be seen the bulk conductivity of the emulsion is less than the theoretical value.

- 19 -

EXAMPLE 2

An emulsion was prepared from the following ingredients:

| 5 | <u>Ingredient</u> | <u>%</u> |
|----|---|-----------------|
| | Ethoxylated (7EO) alcohol ($C_{12}-C_{15}$) | 0.24 w/v |
| | Sodium lauryl sulphate | 3% w/w of the |
| | (30% active) | non-ionic |
| | | surfactant |
| 10 | Deionised water | 47 v/v |
| | Decane | 53 v/v |
| | Actual (measured) conductivity | |
| | of the bulk emulsion | 22.3 $\mu S/cm$ |
| | σ_c | 39.4 $\mu S/cm$ |
| 15 | σ_p | 4.0 $\mu S/cm$ |
| | Assuming $\phi =$ | 0.5 |
| | σ | 14.1 $\mu S/cm$ |
| | Difference (conductivity due the emulsion | |
| | droplets) = 22.3 - 14.1 = 8.2 $\mu S/cm$ | |
| 20 | | |

07-SEP-'99 (TUE) 11:52 R & C PATENTS

TEL:01482 582902

P. 02

- 20 -

EXAMPLE 3 (Comparative)

An emulsion was prepared from the following ingredients:

| 5 | <u>Ingredient</u> | <u>%</u> |
|----|--|------------------------------------|
| | Ethoxylated (7EO) alcohol ($C_{12}-C_{15}$) | 0.24 w/v |
| | Sodium lauryl sulphate (30% active) | 6% w/w of the non-ionic surfactant |
| 10 | Deionised water | 47 v/v |
| | Decane | 53 v/v |
| | Actual (measured) conductivity of the bulk emulsion | 23.3 μS cm |
| | σ_e | 83.0 μS cm |
| 15 | σ_p | 9.0 μS cm |
| | Assuming $\phi =$ | 0.5 |
| | σ | 30.3 μS cm |
| | Difference (conductivity due the emulsion droplets) = $23.3 - 30.3 = -7.0 \mu S$ cm. | |

This composition contains a large amount of component (d) and as can be seen the bulk conductivity of the emulsion is less than the theoretical value

EXAMPLE 4

25

| 25 | <u>Ingredient</u> | <u>%</u> |
|----|--|-----------|
| | Ethoxylated (SEO) alcohol (C_{12-15}) incorporating benzalkonium chloride (50% active) at 2% w/w in surfactant | 0.24% w/v |
| 30 | Deionised water | 47% v/v |
| | Butane 40 | 53% v/v |

This formulation when made up as an aerosol and sprayed though the physical valve/actuator combination

35

- 21 -

described above produced a mono-polar charge on the sprayed droplets of $+1.65 \times 10^{-4}$ C/Kg.

The same formulation was prepared substituting decane for butane in order that the conductivity could be measured.

Actual (measured) conductivity of the bulk emulsion $15.7 \mu\text{S cm}$
 σ_{emulsion} $40.2 \mu\text{S cm}$
 σ_p $32.3 \mu\text{S cm}$
 Assuming $\theta = 0.5$
 σ $13.7 \mu\text{S cm}$
 Difference (conductivity due to the emulsion droplets) = $15.7 - 13.7 = 2.0 \mu\text{S cm}$

EXAMPLE 5

Formulation 1

Ingredient % w/w

Solvent 5.0

Fragrance component 0.70

Butylated hydroxytoluene 0.013

Polyglyceryl oleate 0.30

Deionised Water 58.99

Butane 40 35

The solvent used and the fragrance component that can be used in the above formulation are illustrated in the following examples:

07-SEP. '99 (TUE) 11:52

R & C PATENTS

TEL:01482 582902

P. 029

- 22 -

| Example | Solvent | Fragrance Component | Charge/Mass ($\times 10^{-4}$ C/kg) |
|---------|----------|-------------------------|--------------------------------------|
| 5 | Isopar E | diethyl-o-phthalate | -2.2 |
| 6 | Isopar E | styrallyl acetate | -2.5 |
| 7 | Isopar G | α -methyl ionone | -1.9 |
| 8 | Isopar G | vanillin | -1.6 |
| 9 | heptane | Litsea Cybeba | -1.7 |
| 10 | pentane | Lilial | -2.3 |
| 11 | Isopar E | phenylethyl alcohol | -2.4 |
| 12 | Isopar L | dipropylene glycol | -2.2 |

The Isopar E, G and L range of solvents can be obtained from Exxon.
 The fragrance components used were obtained from Robertet Ltd.

- 23 -

EXAMPLE 13Formulation 2

| | <u>Ingredient</u> | <u>% w/w</u> |
|----|--------------------------|--------------|
| 5 | Solvent | 5.0 |
| | Aromatic component | 0.70 |
| | Butylated hydroxytoluene | 0.013 |
| | Polyglyceryl oleate | 0.30 |
| | Deionised Water | 58.99 |
| 10 | Butane 40 | 35 |

The solvent used and the aromatic component can be used in the above formulation are illustrated in the following examples:

15

20

25

30

07-SEP-'99 (TUE) 11:52 R & G PATENTS

TEL:01482 582902

P. 031

- 24 -

| Example | Solvent | Aromatic Component | Charge/Mass ($\times 10^{-4}$ C/kg) |
|---------|--------------|-----------------------------|--------------------------------------|
| 13 | Solvesol 150 | Cleanox fragrance | -3.0 |
| 14 | Isopar E | n-butyl benzoate | -2.5 |
| 15 | Isopar L | isopropyl-4-hydroxybenzoate | -3.0 |
| 16 | Isopar E | isobutyl acetophenone | +1.6 |
| 17 | heptane | isopropyl acetophenone | +1.7 |
| 18 | pentane | benzoic acid | +1.2 |
| 19 | Isopar V | 2-naphthol | -5.3 |
| 20 | Isopar G | toluene | +1.9 |
| 21 | Pentane | neopentyl benzene | -5.9 |
| 22 | Isopar C | naphthalene | -5.4 |
| 23 | Isopar G | fullerene C60/70 | -4.5 |

- 25 -

EXAMPLE 24Formulation 3Ingredient%

Ethoxylated (5EO) alcohol
(C₁₂₋₁₅) incorporating sodium
laureth sulphate (30% active)

at 4% w/w in surfactant

0.24% w/v

Deionised water

47% v/v

Butane 40

53% v/v

This formulation, when made up as an aerosol and sprayed through the physical valve/actuator combination described above produced a mono-polar charge on the sprayed droplets of -1.1×10^{-4} C/kg.

The same formulation was prepared substituting decane for butane. The formulation had a γ of 26.2 mJm⁻².

An acetal 900P NC-10 insert in the spray head had a γ of 15 mJm⁻².

The difference between these Lewis acid values
= 26.2 - 15 = 11.2 mJm⁻².

07-SEP.'99 (TUE) 11:53 R & C PATENTS

TEL:01482 582902

P. 033

- 26 -

| Ingredient | %w/w | Example 25 | %w/w | Example 26 | %w/w | Example 27 | %w/w | Example 28 |
|--------------------------------------|--------|------------|--------|------------|--------|------------|--------|------------|
| Bioallethrin | 0.194 | 0.194 | 0.914 | 0.036 | 0.036 | 0.194 | 0.194 | 0.194 |
| Bioresmethrin | 0.036 | 0.036 | 0.036 | 0.02 | 0.02 | 0.036 | 0.036 | 0.036 |
| BHT | 0.02 | 0.02 | 0.02 | 0.900 | 0.900 | 0.02 | 0.02 | 0.02 |
| Polyglycerol oleate | 0.900 | 0.900 | 0.180 | 0.100 | 0.100 | 0.900 | 0.900 | 0.900 |
| Oleic acid | 0.09 | 0.09 | 0.100 | 7.500 | 51.07 | 0.045 | 0.023 | 0.023 |
| Perfume | 0.100 | 0.100 | 40.000 | -0.72 | 40.000 | 0.100 | 0.100 | 0.100 |
| Norpar 13 | 7.500 | 7.500 | 51.07 | -0.63 | 40.000 | 7.500 | 7.500 | 7.500 |
| Deionised water | 51.16 | 51.16 | 40.000 | -0.63 | 40.000 | 51.205 | 51.227 | 51.227 |
| H55 | 40.000 | 40.000 | -0.72 | -0.63 | 40.000 | 40.000 | 40.000 | 40.000 |
| Charge/mass (x10 ⁻⁴ C/kg) | -0.75 | -0.75 | -0.68 | -0.68 | -0.63 | -0.63 | -0.90 | -0.90 |

| Ingredient | %w/w | Example 29 | %w/w | Example 30 | %w/w | Example 31 | %w/w | Example 32 |
|--------------------------------------|--------|------------|--------|------------|--------|------------|--------|------------|
| Teric 12A2 | 0.800 | 0.800 | 1.000 | 0.400 | 0.400 | 0.800 | 0.700 | 0.700 |
| Oleic acid | 0.400 | 0.400 | 0.400 | 7.500 | 7.500 | 0.400 | 0.400 | 0.400 |
| Norpar 13 | 7.500 | 7.500 | 51.100 | 51.300 | 51.300 | 7.500 | 7.500 | 7.500 |
| Deionised water | 51.300 | 51.300 | 40.000 | 40.000 | 40.000 | 51.300 | 51.400 | 51.400 |
| H55 | 40.000 | 40.000 | -1.02 | -0.68 | -0.68 | 40.000 | 40.000 | 40.000 |
| Charge/mass (x10 ⁻⁴ C/kg) | -1.02 | -1.02 | -0.68 | -0.68 | -0.68 | -0.816 | -0.816 | -0.816 |

- 27 -

| Ingredient | %w/w | Example 33 | %w/w | Example 34 | %w/w | Example 35 |
|--------------------------------------|------|------------|------|------------|------|------------|
| Teric 12A2 | | 0.600 | | 0.500 | | 1.000 |
| Oleic acid | | 0.400 | | 0.400 | | 0.200 |
| Norpar 13 | | 7.500 | | 7.500 | | 7.500 |
| Deionised water | | 51.500 | | 51.600 | | 51.300 |
| H55 | | 40.000 | | 40.000 | | 40.000 |
| Charge/mass (x10 ⁻⁴ C/kg) | | -1.596 | | -0.966 | | -1.53 |

| Ingredient | %w/w | Example 36 | %w/w | Example 37 |
|--------------------------------------|------|------------|------|------------|
| Teric 12A2 | | 1.000 | | 1.000 |
| Oleic acid | | 0.400 | | 0.800 |
| Perfume | | 0.100 | | 0.100 |
| Norpar 13 | | 7.500 | | 7.500 |
| Deionised water | | 51.100 | | 50.700 |
| H55 | | 40.000 | | 40.000 |
| Charge/mass (x10 ⁻⁴ C/kg) | | -0.57 | | -0.738 |

07-SEP. '99 (TUE) 11:53 R & G PATENTS

TEL:01482 582902

P. 035

- 28 -

| Ingredient | %w/w Example 38 | %w/w Example 39 | %w/w Example 40 |
|--------------------------------------|--------------------|--------------------|--------------------|
| Teric 12A2 | 1.000 | 1.000 | 1.000 |
| Lauric acid | 0.100 | 0.200 | 0.400 |
| Norpar 13 | 7.500 | 7.500 | 7.500 |
| Deionised water | 51.400 | 51.300 | 51.100 |
| H55 | 40.000 | 40.000 | 40.000 |
| Charge/mass (x10 ⁻⁴ C/kg) | -0.532 | -0.578 | -0.574 |

| Ingredient | %w/w Example 41 | %w/w Example 42 |
|--------------------------------------|--------------------|--------------------|
| Teric 12A2 | 1.000 | 1.000 |
| Palmitic acid | 0.010 | 0.020 |
| Norpar 13 | 7.500 | 7.500 |
| Deionised water | 51.400 | 51.300 |
| H55 | 40.000 | 40.000 |
| Charge/mass (x10 ⁻⁴ C/kg) | -0.502 | -0.704 |

- 29 -

| Ingredient | %w/w Example 43 | %w/w Example 44 | %w/w Example 45 | %w/w Example 46 |
|--------------------------------------|--------------------|--------------------|--------------------|--------------------|
| Teric 12A2 | 0.700 | 0.720 | 0.700 | 0.700 |
| Oleic acid | 0.500 | 0.400 | 0.400 | 0.400 |
| Norpar 13 | 7.500 | 7.500 | 7.500 | 7.500 |
| Deionised water | 41.300 | 31.38 | 51.400 | 51.300 |
| H55 | | | | 40.000 |
| H46 | 50.000 | 60.000 | 40.000 | - |
| Charge/mass (x10 ⁻⁴ C/kg) | 1.39 | 2.12 | -0.71 | -1.65 |

Ingredient %w/w Example 47

| | |
|--------------------------------------|--------|
| Teric 17A2 | 0.85 |
| Oleic acid | 0.350 |
| Norpar 13 | 5.000 |
| Deionised water | 33.80 |
| H46 | 60.000 |
| Charge/mass (x10 ⁻⁴ C/kg) | -4.8 |

07-SEP. '99 (TUE) 11:53 R & C PATENTS

TEL:01482 582902

P. 037

- 30 -

| Ingredient | %w/w | %w/w |
|--------------------------------------|------------|------------|
| | Example 48 | Example 49 |
| Norpar 13 | 5.00 | 5.00 |
| Bioallethrin | 0.25 | 0.25 |
| Bioresmethrin | 0.05 | 0.05 |
| BHT | 0.02 | 0.02 |
| Deionised water | 33.28 | 33.58 |
| Teric 17A3 | 0.60 | 0.35 |
| Crill 45 | 0.40 | 0.35 |
| Pine Fragrance | 0.10 | 0.10 |
| Oleic acid | 0.30 | 0.30 |
| H46 | 60.00 | 60.00 |
| Charge/mass (x10 ⁻⁴ C/kg) | -1.41 | -1.34 |

- 31 -

| Ingredient | %w/w | Example 50 |
|---|--------|------------|
| Bioallethrin | 0.209 | |
| Bioresmethrin | 0.039 | |
| BHT | 0.005 | |
| Polyglycerol oleate (containing from 0.01 to 1% by weight of sodium or potassium oleate) | 0.900 | |
| Perfume | 0.100 | |
| Norpar 13 | 7.500 | |
| Deionised water | 51.247 | |
| H55 | 40.000 | |
| Charge/mass ($\times 10^{-4}$ C/kg) | -1.59 | |

07-SEP. '99 (TUE) 11:54 R & C PATENTS

TEL:01482 582902

P.039

- 32 -

| Ingredient | Comparative Example A | Comparative Example B | Comparative Example C |
|--------------------------------------|--------------------------|--------------------------|--------------------------|
| Teric 12A2 | - | 1.000 | 1.000 |
| Bioallethrin | 0.194 | - | - |
| Bioresmethrin | 0.036 | - | - |
| BHT | 0.02 | - | - |
| Polyglycerol oleate | 0.900 | - | - |
| Perfume | 0.100 | - | - |
| Norpar 13 | 7.500 | 7.500 | 7.500 |
| Deionised water | 51.25 | 51.50 | 51.500 |
| H55 | 40.000 | 40.000 | 40.000 |
| Crill 45 | 0.40 | 0.35 | - |
| Charge/mass (x10 ⁻⁴ C/kg) | -0.35 | +0.21 | -0.017 |

- 33 -

Ingredients and Availability

| | | | |
|----|----------------------------------|---|--|
| | Oleic acid ¹ | : | Technical (Croda Chemicals) |
| | Lauric acid ¹ | : | Reagent Grade (BDH) |
| 5 | Palmitic acid ¹ | : | Reagent Grade (BDH) |
| | Teric 17A3 ² | : | C ₁₇ alcohol with 3 moles of ethylene oxide (Orica) |
| | Teric 17A2 ² | : | C ₁₇ alcohol with 2 moles of ethylene oxide (Orica) |
| 10 | Teric 12A2 ² | : | C ₁₂ alcohol with 2 moles of ethylene oxide (Orica) |
| | Crill 45 ² | : | Sorbitan trioleate (Orica) |
| | Polyglycerol oleate ² | : | Croda Chemicals |
| | BHT ⁴ | : | Butylated hydroxytoluene (Orica) |
| 15 | Norpar 13 ⁵ | : | liquid n-paraffin (Exxon) |
| | Bioallethrin ³ | : | 93% w/w (Agrevo) |
| | Bioresmethrin ³ | : | 93% w/w (Agrevo) |
| | H46 ⁶ | : | 16% w/w propane/butane blend (Boral) |
| 20 | H55 ⁶ | : | 26% w/w propane/butane blend (Boral) |
| | 1: Ionic Compound (d) | : | 2: Non-ionic surfactant |
| | 3: Insecticide | : | 4: Antioxidant |
| 25 | 5: Solvent | : | 6: Propellant |

30

- 34 -

no CLAIMS: not in prior art kind of claim

1. An electrically neutral composition in the form of a water-in-oil or an oil-in-water emulsion, in which droplets of the emulsion on discharge from an aerosol spray device are imparted with a unipolar electrostatic charge, which composition comprises:
 - (a) at least one propellant in an amount of from 2 to 80% w/w;
 - (b) at least one non-ionic surfactant in an amount of from 0.01 to 10% w/w;
 - (c) optionally one or more solvents within the oil phase in an amount of up to 40% w/v;
 - (d) at least one polar or ionic or aromatic or linearly conjugated compound which is attracted to the interface between the disperse phase and the continuous phase of the emulsion in an amount of from 0.1 to 80% w/w based on the non-ionic surfactant, but which is such that the theoretical conductivity of the emulsion is less than the bulk conductivity of the emulsion; and
 - (e) water.

2. A composition as claimed in claim 1 wherein the difference between the theoretical conductivity of the emulsion and the bulk conductivity of the emulsion is at least $+ 0.5 \mu S \text{ cm}$.

3. A composition as claimed in claim 2 wherein the difference between the theoretical conductivity of the emulsion and the bulk conductivity of the emulsion is at least $+ 4 \mu S \text{ cm}$.

4. A composition as claimed in claim 2 wherein the difference between the theoretical conductivity of

- 35 -

the emulsion and the bulk conductivity of the emulsion is at least $+ 6\mu S$ cm.

and the emulsion is selected from the following:

- 5 5. A composition as claimed in any one of the preceding claims wherein at least 90% by volume of the droplets of the disperse phase within the emulsion have an average diameter of less than $60\mu m$.

- 10 6. A composition as claimed in claim 5 wherein at least 90% by volume of the droplets of the disperse phase within the emulsion have an average diameter in the range of from 20 to $40\mu m$.

- 15 7. A composition as claimed in any one of the preceding claims wherein at least one non-ionic surfactant is selected from mono, di and tri sorbitan esters, polyoxyethylene mono, di and tri sorbitan esters, mono and polyglyceryl esters, alkoxyated alcohols, alkoxyated amines, alkoxyated acids, amine
20 oxides, ethoxyated/propoxyated block copolymers, alkoxyated alkanolamides, and alkoxyated alkyl phenols.

- 25 8. A composition as claimed in claim 8 wherein the ionic surfactant contains at least one alkyl, allyl or substituted phenyl group containing at least one C_6 to C_{22} carbon chain.

- 30 9. A composition as claimed in any one of the preceding claims wherein component (d) is selected from

- 35 a) alkali metal salts, alkaline earth metal salts, ammonium salts, amine salts or amino alcohol salts of one or more of the following compounds: alkyl sulphates, alkyl ether sulphates, alkylamidoether

- 36 -

sulphates, alkylaryl polyether sulphates, monoglyceride
 sulphates, polyglyceride sulphates, alkyl sulphonates,
 alkylamine sulphonates, alkylaryl sulphonates, olefin
 sulphonates, paraffin sulphonates, alkyl sulpho-
 5 succinates, alkylether sulphosuccinates, alkylamide
 sulphosuccinates, alkyl sulphocinnamates, alkyl
 sulphoacetates, alkyl phosphates, alkylether
 phosphates, acyl sarcosinates, acyl isothionates and
 N-acyl taurates,

10 b) alkylamidopropylbetaines, alkylamido-
 betaines, alkylamidosulphobetaines, alkylbetaines,
 aminimides, quaternary ammonium compounds and
 quaternary phosphonium compounds;

15 c) carboxylic acids, carboxylic acid salts,
 esters, ketones, aldehydes or amides of carboxylic
 acids containing from 6 to 30 carbon atoms;

20 d) diethyl orthophthalate, methylphenylcarbinyl
 acetate, α -methyl ionone, 4-hydroxy-3-methoxy-
 benzaldehyde, phenylethyl alcohol, dipropylene glycol,
 styryl acetate, n-butyl benzoate, isopropyl 4-
 hydroxybenzoate, isobutyl acetophenone, isopropyl
 acetophenone, nicotinic acid, benzoic acid, 2-naphthol,
 neopentyl benzene, naphthalene, toluene and fullerene.

25 10. A composition as claimed in any one of the
 preceding claims wherein component (d) is present in
 the composition in an amount of from 0.01 to 30% w/w,
 preferably 0.1 to 10% w/w based on the weight of
 component (b).

30 11. A composition as claimed in any one of the
 preceding claims wherein the droplets formed on
 discharge from an aerosol spray device have a charge
 to mass ratio of at least $\pm 1 \times 10^{-4}$ C/kg,
 35 preferably at least $\pm 2 \times 10^{-4}$ C/kg.

- 37 -

12. A composition as claimed in any one of the preceding claims which is an insecticidal composition which includes one or more insecticides therein in an amount of from 0.001 to 5% w/w.

13. A method of enhancing the unipolar charge which is imparted to droplets of an emulsion on discharge from an aerosol spray device in which the droplets are formed from an oil-in-water or a water-in-oil emulsion composition which comprises:

(a) at least one propellant in an amount of from

2 to 80% w/w;

(b) at least one non-ionic surfactant in an amount of from 0.01 to 10% w/w;

(c) optionally one or more solvents within the oil phase in an amount of up to 40% w/w;

(d) at least one polar or ionic or aromatic or conjugated compound which is attracted to the interface between the disperse phase and the continuous phase of the emulsion in an amount of from 0.01 to 80% w/w based on the non-ionic surfactant, but which is such that the theoretical conductivity of the emulsion is less than the bulk conductivity of the emulsion; and

(e) water.

14. The use of a non-ionic surfactant and at least one polar or ionic or aromatic or conjugated compound in an amount of from 0.01 to 80% w/w based on the non-ionic surfactant to enhance the electrostatic charge imparted to droplets of a composition in the form of a water-in-oil or an oil-in-water emulsion on discharge from an aerosol spray device, which composition includes:

(a) at least one propellant in an amount of from

- 38 -

52 to 80% w/w; (b) optionally one or more solvents within the

oil phase in an amount of up to 40% w/w; and

(c) water;

5 and the amount of the polar or ionic or aromatic or conjugated compound being such that the theoretical conductivity of the emulsion is less than the bulk conductivity of the emulsion.

10 15. An aerosol spray which contains an electrically neutral composition in the form of a water-in-oil emulsion, an oil-in-water emulsion or a single phase composition, in which droplets of the composition on discharge from the aerosol spray device
15 are imparted with a unipolar electrostatic charge, wherein the formulation of the composition and the material of the portion of the aerosol spray device with which the liquid comes into contact on spraying are selected such that

20 i) the difference between the Lewis base component of the liquid and the Lewis base component of the material with which the liquid comes into contact on spraying is at least $\pm 5 \text{ mJm}^{-2}$;

25 and/or:

ii) the difference between the Lewis acid component of the liquid and the Lewis acid component of the material with which the liquid comes into contact on spraying is at
30 least $\pm 0.5 \text{ mJm}^{-2}$.

16. An aerosol spray device as claimed in claim
35 15 wherein the difference in i) is at least $\pm 10 \text{ mJm}^{-2}$ and/or the difference in ii) is at least $\pm 1 \text{ mJm}^{-2}$.

- 39 -

17. An aerosol spray device as claimed in claim 15 or 16 wherein the difference i) is at least $\pm 15 \text{ mJm}^{-2}$ and/or the difference in ii) is at least $\pm 2 \text{ mJm}^{-2}$.

5

18. An aerosol spray device as claimed in any one of claims 15 to 17 wherein the composition contained therein is a composition as claimed in any one of claims 1 to 14.

10

07-SEP.'99 (MUE) 11:56 R & C PATENTS

TEL:01482 582902

P.047

ABSTRACT

COMPOSITIONS

- 5 An electrically neutral composition in the form of a water-in-oil or an oil-in-water emulsion, in which droplets of the emulsion are imparted with a unipolar electrostatic charge on discharge from an aerosol spray device.

10

1/1




FIG 1a




FIG 1b




FIG 1c

